

WP-XXX/G6-120H

Half-Cut Monocrystalline PERC Solar Module

Mono PERC Module

120 CELL

Power Output Range


365-380 W

Maximum System Voltage

1500V DC

Maximum Efficiency

20.90%

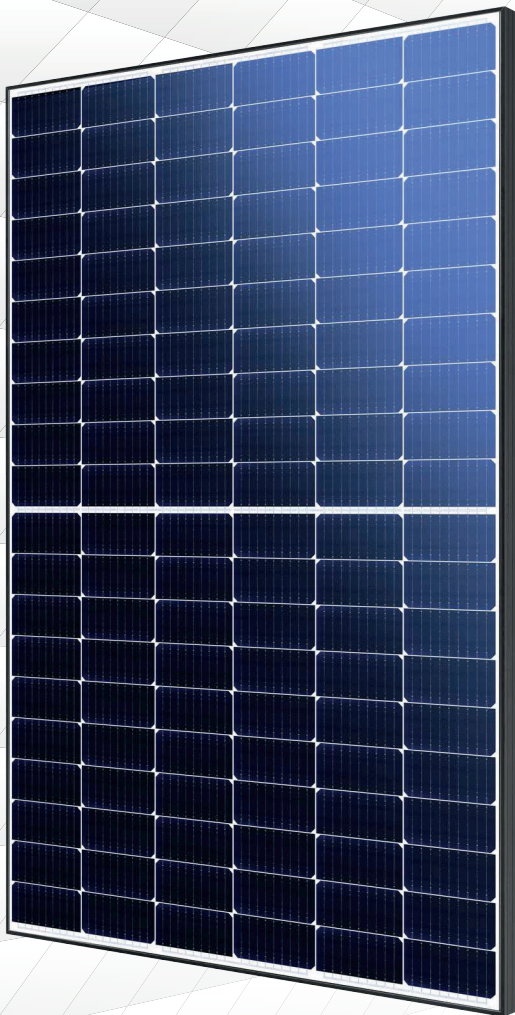

OUTSTANDING PRODUCT PERFORMANCE

- Cutting-edge half cut technology
- High power output reaching 380w with module efficiency up to 20.9%
- Reduce hot spot risk and power loss with lower working temperature
- Low power loss under shading conditions

- Minimized micro-cracks with innovation non-destructive cutting technology
- Positive tolerance guaranteed: 0-+5W



CERTIFIED TO STAND EXTREME WEATHER CONDITIONS

- Mechanical performance up to 5400Pa positive load and 2400Pa negative load



HIGH RELIABILITY

- Monitored and tested with strengthened quality control system
- Solid PID resistance
Ensured by solar cell process optimization and material control
- 100% EL double inspection




A BETTER INVESTMENT CHOICE

- Higher power output
- Higher module efficiency, 1500V DC design to bring higher energy yield, saving BOS cost
- Inclusive 15 years product warranty and 25 years performance warranty

CERTIFICATES

IEC61215, IEC61730
 ISO 9001:2015 Quality management system
 ISO 14001 Standards for environment management system
 OHSAS 18001 International standards for occupational health & safety

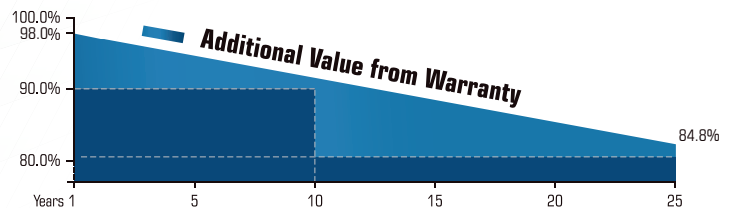


15-year Product Warranty

25-year Linear Performance Warranty



Module Dimension (mm)

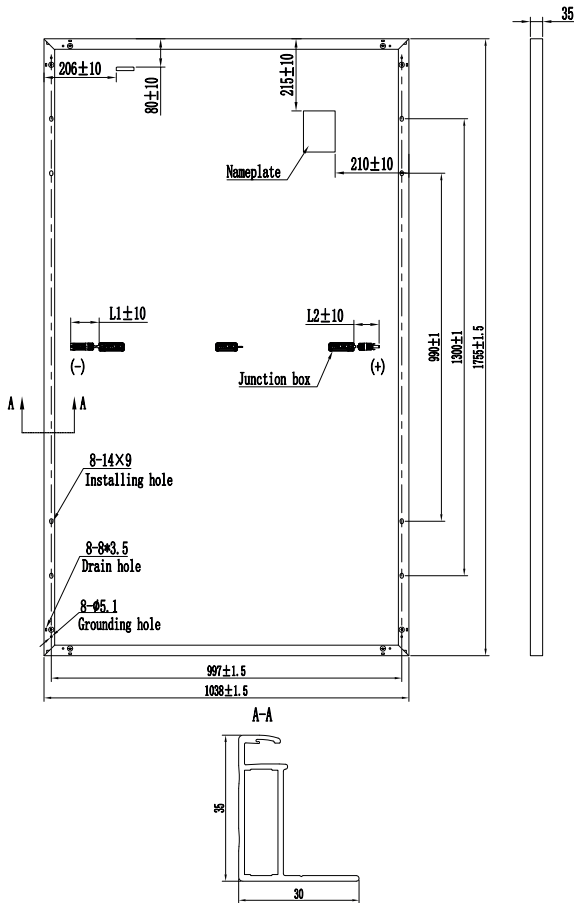

Electrical Characteristics (STC*)

Power Class		365	370	375	380
Nominal Power (Pmax)	(W)	365	370	375	380
Open Circuit Voltage (Voc)	(V)	41.30	41.50	41.60	41.70
Short Circuit Current (Isc)	(A)	11.63	11.72	11.85	11.98
Voltage at Pmax (Vmp)	(V)	33.90	34.10	34.20	34.30
Current at Pmax (Imp)	(A)	10.77	10.86	10.98	11.09
Module Efficiency	(%)	20.00	20.30	20.60	20.90
Power Tolerance		0~+5W			

* Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5

Electrical Characteristics (NOCT*)


Power Class		365	370	375	380
Nominal Power (Pmax)	(W)	270	274	278	281
Open Circuit Voltage (Voc)	(V)	39.00	39.20	39.30	39.40
Short Circuit Current (Isc)	(A)	9.39	9.46	9.57	9.67
Voltage at Pmax (Vmp)	(V)	32.00	32.20	32.30	32.40
Current at Pmax (Imp)	(A)	8.44	8.51	8.61	8.67

*Irradiance of 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s

Mechanical Characteristics

Number of Cells	120 cells(6x20)
Cell Type	Monocrystalline 166mm x 83mm
Dimensions of Module L*W*H (mm)	1755x1038x35 mm
Weight (kg)	19.5
Glass	3.2mm AR Coating tempered glass
Frame	Anodized aluminium alloy
J-Box	IP68,3 Bypass Diodes
Cable	4mm ² (IEC),1150mm
Wind/ Snow Load	2400Pa/5400Pa
Connector	Staubli EVO2 or Compatible

Current-Voltage Curve, WP-380/G6-120H

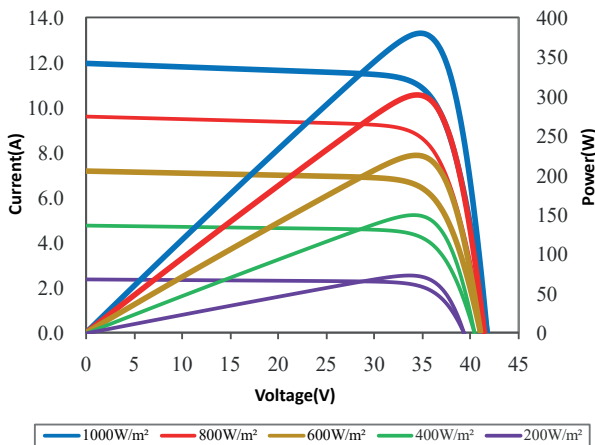

Temperature Characteristics

Nominal Operation Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficient of Pmax	-0.39%/°C
Temperature Coefficient of Voc	-0.29%/°C
Temperature Coefficient of Isc	0.049%/°C

Design Characteristics

Operating Temperature	-40°C TO +85°C
Maximum System Voltage	1000V / 1500V DC(IEC)
Max Series Fuse Rating	20A
Application Classification	Class A
Module Fire Performance	Class C

Packing Information

Module per Pallet	31 pieces
Module per 40' container	806 pieces

*Wattpower reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.