


Three phase hybrid inverters 8 to 12 kW

Three phase hybrid inverters



Models:
ASW08kH-T1
ASW10kH-T1
ASW12kH-T1

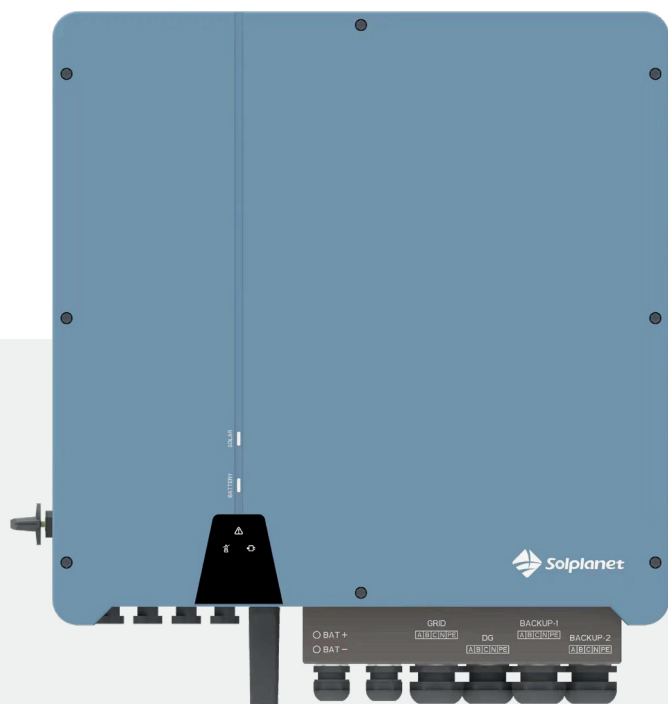

Easy-to-install

- Quick setup and commissioning with Aiswei apps
- Compact wall mount design



Reliable

- Smart energy management
- UPS capability - power during blackouts
- IP65 rated design for outdoor use



User-friendly

- User friendly app interface
- Online monitoring via Wi-Fi and Aiswei apps
- Support unbalanced output

Technical Data Sheet

ASW08kH-T1

ASW10kH-T1

ASW12kH-T1

PV Input	Max. PV array power	12 kW _p STC	15 kW _p STC	18 kW _p STC
	Max. input voltage	1000 V		
	MPP voltage range	180 V to 850 V		
	Min. input voltage / start voltage	125 V / 180 V		
	No. of independent MPPT trackers / strings per MPPT input	2 / (1/1)		
	Max. input current per MPP tracker	13 A		
	Max. short-circuit current per MPP tracker	25 A		
Battery	Battery type	Lead-acid or Lithium-ion		
	Battery voltage range	125 V to 600 V		
	Max. charging / discharging power	8.8 kW / 8.8 kW	11 kW / 11 kW	13.2 kW / 13.2 kW
	Max. charging current / discharging current	50 A / 50 A		
	Rated. charging current / discharging current	40 A / 40 A		
AC output	Nominal AC voltage	3W+N+PE, 220 / 380 V; 230 / 400 V; 240 / 415 V		
	AC voltage range	360 V - 440 V		
	Rated AC grid frequency	50 Hz / 60 Hz		
	AC grid frequency range	50 Hz±5Hz / 60 Hz±5Hz		
	Rated active power	8 kW	10 kW	12 kW
	Rated apparent power	8 kVA	10 kVA	12 kVA
	Max. apparent power	8.8 kVA	11 kVA	13.2 kVA
	Rated grid output Current (@400V)	11.6 A	14.5 A	17.4 A
	Max. grid output current	12.7A	15.9A	19.1A
	Harmonics THDi (@ Nominal power)	< 3%		
AC input	Rated grid voltage	3W+N+PE, 220 / 380 V; 230 / 400 V; 240 / 415 V		
	Rated grid frequency	50 Hz / 60 Hz		
	Rated apparent power	8 kW	10 kW	12 kW
	Max. input apparent power from grid	8 kVA	10 kVA	12 kVA
	Rated input current from grid	11.6 A	14.5 A	17.4 A
	Max. input current from grid	11.6 A	14.5 A	17.4 A
EPS output	Nominal output voltage	3W+N+PE, 220 / 380 V; 230 / 400 V; 240 / 415 V		
	Nominal output frequency	50 Hz / 60 Hz		
	Rated apparent power	8 kVA	10 kVA	12 kVA
	Max. output apparent power	8 kVA	10 kVA	12 kVA
	Peak output apparent power	8.8 kVA	11 kVA	13.2 kVA
	Rated Current (@400V)	11.6 A	14.5 A	17.4 A
	Max. output current	12.7 A	15.9 A	19.1 A
	Max. switch time	≤ 20 ms		
	Output THDi (@ Linear load)	< 2 %		

Technical Data Sheet

ASW08kH-T1

ASW10kH-T1

ASW12kH-T1

		ASW08kH-T1	ASW10kH-T1	ASW12kH-T1
Efficiency	MPPT efficiency	≥ 99.5 %		
	Max efficiency	97.90 %	98.20 %	98.20 %
	Euro efficiency	97.20 %	97.50 %	97.50 %
	Max. battery to load efficiency	97.50 %	97.50 %	97.60 %
Safety protection	DC-side disconnection device	●		
	PV string- / Battery input reverse polarity protection	● / ●		
	All-pole sensitive residual current monitoring unit	●		
	Anti-islanding protection	●		
	Ground fault protection	●		
	AC output over current protection	●		
	AC output short circuit current protection	●		
	AC over voltage protection	●		
	Protection class (as per IEC 62109-1)	I		
	overvoltage category (as per IEC 62109-1)	AC: III; DC: II		
General data	Power factor at rated power / adjustable displacement	≥0.99 / 0.8 leading to 0.8 lagging		
	Dimensions (W / H / D)	530 / 200 / 560 mm		
	Device weight	21.5 kg		
	Operating temperature range	-25 °C ... +60 °C		
	Noise emissions (typical)	< 35 dB(A)		
	Standby consumption	< 3 W		
	Cooling concept	Natural convection		
	Ingress protection rating (as per IEC 60529)	IP65		
	Climatic category (according to IEC 60721-3-4)	4K4H		
	Max. permissible value for relative humidity (non-condensing)	0 ~ 95 %		
	Max. operating altitude	4000m (> 2000 m power derating)		
	Country of Manufacture	THE PEOPLE'S REPUBLIC OF CHINA		
	Features	Inverter topology (Solar/ battery)	Transformerless / Transformerless	
User interface		LED & App		
Communication with BMS		RS485 / CAN		
Communication with meter		RS485		
Communication with portal		WIFI stick		
Integrated power control / Zero export control		● / ●		
Grid		EN 50549-1, RfG 3		
Safety		EN 62109-1, EN 62109-2		
EMC		IEC 61000-6-1/-2/-3/-4, IEC 61000-3-11, IEC61000-3-12		

● Standard features / ○ optional features / – not available

Version: March 2022