

**VGA 22.5x45mm 15+1pin socket**




**Markings:**

Code: FU/FA-2420-VGA-16

**Description and Technical Characteristics of the Product:**

Low-current VGA socket in 22.5x45 adapter (1 module), 45x45 mounting standard, D-Sub 15-pin female connector, connection of all wires 15+1-pin to screw terminals. It is characterised by a compact design so that it can be used in cable ducts as deep as 40mm. Designed for use in ICT and audio/video systems. Mounting by snapping into UCHKP quick-mount bracket, OBUK surface-mount enclosure, RAMK masking frame.

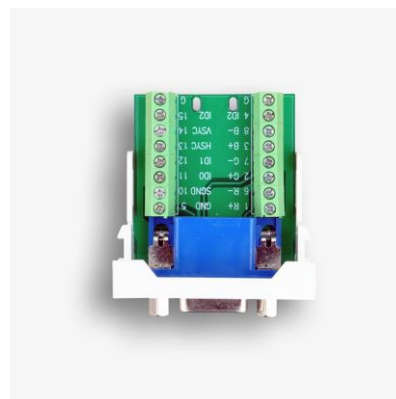

**Markings:**

VGA 22.5x45mm 15+1pin socket; code: FU/FA-2420-VGA-16

**Products compatible with the socket:**

mounting frames:

RAMK-2/M 2-module masking frame with metal bracket, suitable for channels: KP90x60,

---

	110x60, 130x60, 150x60 and PU-2 boxes
RAMK-4/M	4-module masking frame with metal bracket, suitable for channels: KP90x60, 110x60, 130x60, 150x60 and PU-4 boxes
RAMK-6/M	6-module masking frame with metal bracket, suitable for channels: KP90x60, 110x60, 130x60, 150x60 and PU-6 boxes

complete surface-mount enclosures:

OBUK-2/M	2-module surface-mount enclosure for 45x45mm standard fixtures (includes metal SUP bracket and RAM frame)
OBUK-4/M	4-module surface-mount enclosure for 45x45mm standard fixtures (includes metal SUP bracket and RAM frame)
OBUK-6/M	6-module surface-mount enclosure for 45x45mm standard fixtures (includes metal SUP bracket and RAM frame)

quick-mount brackets in the ducts

UCHKP-2	2-module holder-frame for KP 90x40, 90x60, 110x60, 150x60
UCHKP-4	4-module holder-frame for KP 90x40, 90x60, 110x60, 150x60
UCHKP-6	6-module holder-frame for KP 90x40, 90x60, 110x60, 150x60 (when installing power sockets, it is preferred to install integrated triple or double sockets)

**Technical parameters:**

Mechanical:

colour: white

dimensions (W x H x D): 22.5x45x38mm

weight: 18g

Socket:

Connector type: D-SUB 15-pin/15+1 x screw terminal

Operating temperature: -10°C to +68°C

Humidity: 10 to 90%

We have made every effort to ensure that the information presented is accurate and complete. However, we are not responsible for the accuracy and completeness of the data and, in particular, we cannot guarantee that this specification does not contain errors or mistakes. The information contained in this specification may be changed at any time without notice.