

Data Sheet

3.5mm jack socket 22.5x45mm, white


Markings:

Code: FU/FA-2420-PHJ

Description and Technical Characteristics of the Product:

Jack socket 3.5mm female in 22.5x45 adapter (1 module), 45x45 mounting standard, connection of wires to jack connector with screw terminal. It is characterised by a compact design so that it can be used in cable ducts as deep as 40mm. Designed for use in ICT systems, audio/video systems, TV and CCTV.

Mounting by snapping into UCHKP quick-mount bracket, OBUK surface-mount enclosure, RAMK masking frame, floor and countertop boxes, etc.

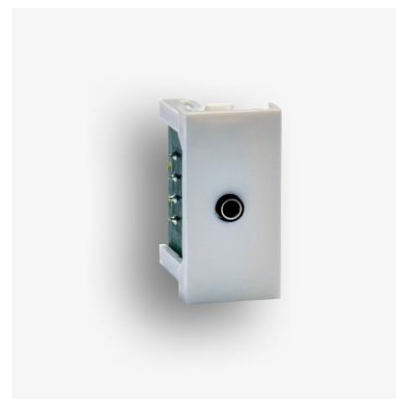

Markings:

3.5mm jack socket 22.5x45mm, white; code: FU/FA-2420-PHJ

Products compatible with the socket: (Selected)

mounting frames:

- RAMK-2/M 2-module masking frame with metal bracket, for ducts: KP90x60, 110x60, 130x60, 150x60 and PU-2 boxes
- RAMK-4/M 4-module masking frame with metal bracket, for ducts: KP90x60, 110x60, 130x60, 150x60 and PU-4 boxes
- RAMK-6/M 6-module masking frame with metal bracket, for ducts: KP90x60, 110x60, 130x60, 150x60 and PU-6 boxes

complete surface-mount enclosures:

- OBUK-2/M 2-module surface-mount enclosure for 45x45mm standard fixtures (includes metal SUP bracket and RAM frame)
- OBUK-4/M 4-module surface-mount enclosure for 45x45mm standard fixtures (includes metal SUP bracket and RAM frame)
- OBUK-6/M 6-module surface-mount enclosure for 45x45mm standard fixtures (includes metal SUP bracket and RAM frame)

Data Sheet

quick-mount brackets in the ducts

UCHKP-2	2-module holder-frame for KP 90x40, 90x60, 110x60, 150x60
UCHKP-4	4-module holder-frame for KP 90x40, 90x60, 110x60, 150x60
UCHKP-6	6-module holder-frame for KP 90x40, 90x60, 110x60, 150x60

Technical parameters:

Mechanical:

colour: white

dimensions (W x H x D): 22.5x45x33mm

weight: 18g

Socket:

Connector type: F female/F female

Operating temperature: -10°C to +68°C

Humidity: 10 to 90%

We have made every effort to ensure that the information presented is accurate and complete. However, we are not responsible for the accuracy and completeness of the data and, in particular, we cannot guarantee that this specification does not contain errors or mistakes. The information contained in this specification may be changed at any time without notice.